

LED Panel Light

EAS-P66-30XX



Features


- Color: cool white, warm white, nature white, other available
- Enclosure material: Al6063, PMMA.
- Beam angel: 110 Degree
- Saving energy: 50%
- Life span >50,000HRS
- IP code: IP40
- Working voltage: DC 36-42V
- LED Source: 3014 SMD LED
- Reflector: milk color PMMA
- No UV,no IR
- Standard warranty 5 years
- Safety standard: RoHS, CE,UL pending

Applications

- Hotels
- Conference / Meeting rooms
- Factories & Offices
- Commercial Purposes.
- Residential / Institution Buildings
- Schools, Colleges & Universities
- Hospitals
- Places where energy saving and high color rendering index lighting are needed.



Dimensions (Unit: mm/inch)



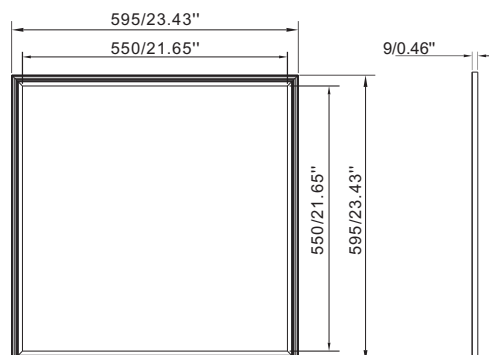


All dimension tolerance is $\pm 0.5\text{mm}$ unless otherwise noted.

Specifications

Model #	Color	LED Type	CCT	Rated Power Consumption	CRI	Luminous Flux	Working Voltage	Beam Angle	Weight
EAS-P66-3050	Cool White	SMD3014	5500-6500K	30W	80	3018 lm	DC 36~42V	110°	3.75 kg
EAS-P66-3040	Nature White	SMD3014	3900-4500K	30W	80	3002 lm	DC 36~42V	110°	
EAS-P66-3030	Warm White	SMD3014	2700-3200K	30W	80	2986 lm	DC 36~42V	110°	


Average Illuminance Figure

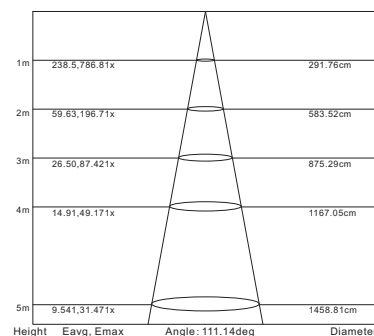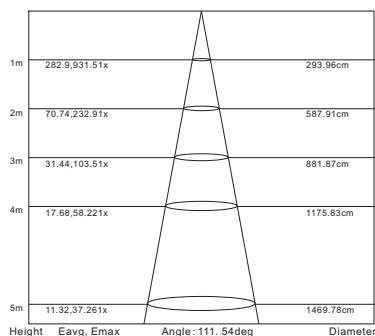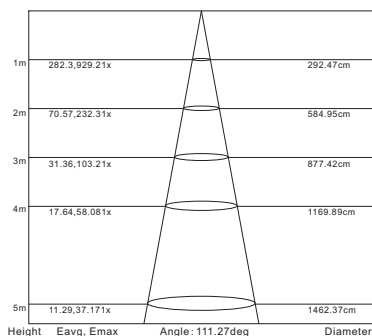

Absolute Maximum Rating

Parameter	Rating	Units
Aluminum Heat sink Temperature	70	° C
Operating Temperature	-20~+40	° C
Storage Temperature	-20~+80	° C
Equilibrium Temperature	58	° C

Electrical Connection

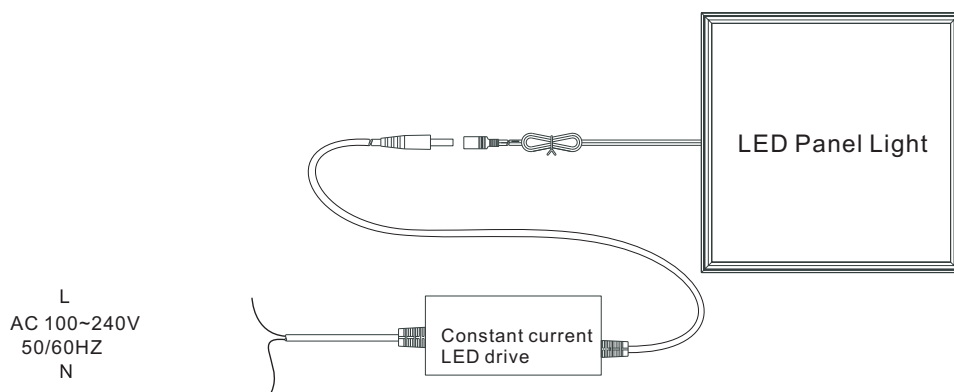

Installation Instructions

1	2	3
Schematic diagram for ceiling installation 1. Mounting the ceiling bracket to ceiling 2. Mounting the short bracket 3. Hang up the panel to the wall bracket, fix both use the screws	Schematic diagram for embedded installation 1. Move away ceiling plaster slab, then arrange the wire. 2. Connect the power. 4. Fix the panel light to suitable place.	Schematic diagram for vertical installation 1. Install the hanging fixed block in order 2. Mounting the short bracket 3. Fix the rope on suitable height by using lifter

Packing Specification(mm)

- 1.All dimension units are millimeter.
- 2.5 pcs inner boxes in one carton.

